



MIKE'S PANELS
COLD ROOM PANELS AND DOORS

BY SWING REFRIGERATED DOOR



- Value for money
- Easy installation

Rigid Swing Refrigerated Door



Door description

Cold storage door designed specifically for separating work rooms or refrigerated warehouses. It has a specific design that integrates very well into installations finished with sandwich panels. It can be 1 or 2 leaves.

It stands out for its excellent quality and finish. It complies with the sanitary standards and the expected performance for this type of cold storage door.

Main Advantages

The door includes a frame and counter frame in white lacquered extruded aluminium that allows easy adaptability as well as quick assembly. The use of high quality materials and its design are designed so that the door has a minimum level of maintenance.

The door leaf is insulated with polyisocyanurate foam (PIR).

Lacquered Steel
Sheet 0.02 in /
0.6 mm

OPENING

90°

Technical characteristics

FRAME	PROFILE	<ul style="list-style-type: none"> • Frame and counterframe in white lacquered extruded aluminium • High corrosion resistance treatment • Fixed with hidden screws and adaptable to different thicknesses
FEUILLE	PROFILE	<ul style="list-style-type: none"> • Anodized extruded aluminum (stainless steel) • High corrosion resistance treatment
	ISOLATION	<ul style="list-style-type: none"> • Rigid polyisocyanurate foam (PIR)
	THICKNESS	<ul style="list-style-type: none"> • 1.57 in / 40 mm
	SHEET METAL	<ul style="list-style-type: none"> • Galvanized steel and lacquered in white RAL 1006 • 0.02 in / 0.6 mm thick sheet metal
	BURLETTE	<ul style="list-style-type: none"> • Very flexible and resistant, with an alveolus
HARNES	VIEWFINDER	<ul style="list-style-type: none"> • Methacrylate in 0.24 in / 6 mm • Measures: 11.81x15.75 in / 300x400 mm
	HINGES	<ul style="list-style-type: none"> • Double-action grey composite in stainless steel • Stainless steel shaft • With 90° retention
OPTIONS	DOOR SCREWS	<ul style="list-style-type: none"> • Stainless steel
		<ul style="list-style-type: none"> • Lock with key • Bottom-area leaf protection in checkered aluminium, stainless steel, or 0.20 in / 5 mm polyethylene

**1 or 2
LEAVES**


OPTION

Detailed photos of the door






Basic dimensions for mounting

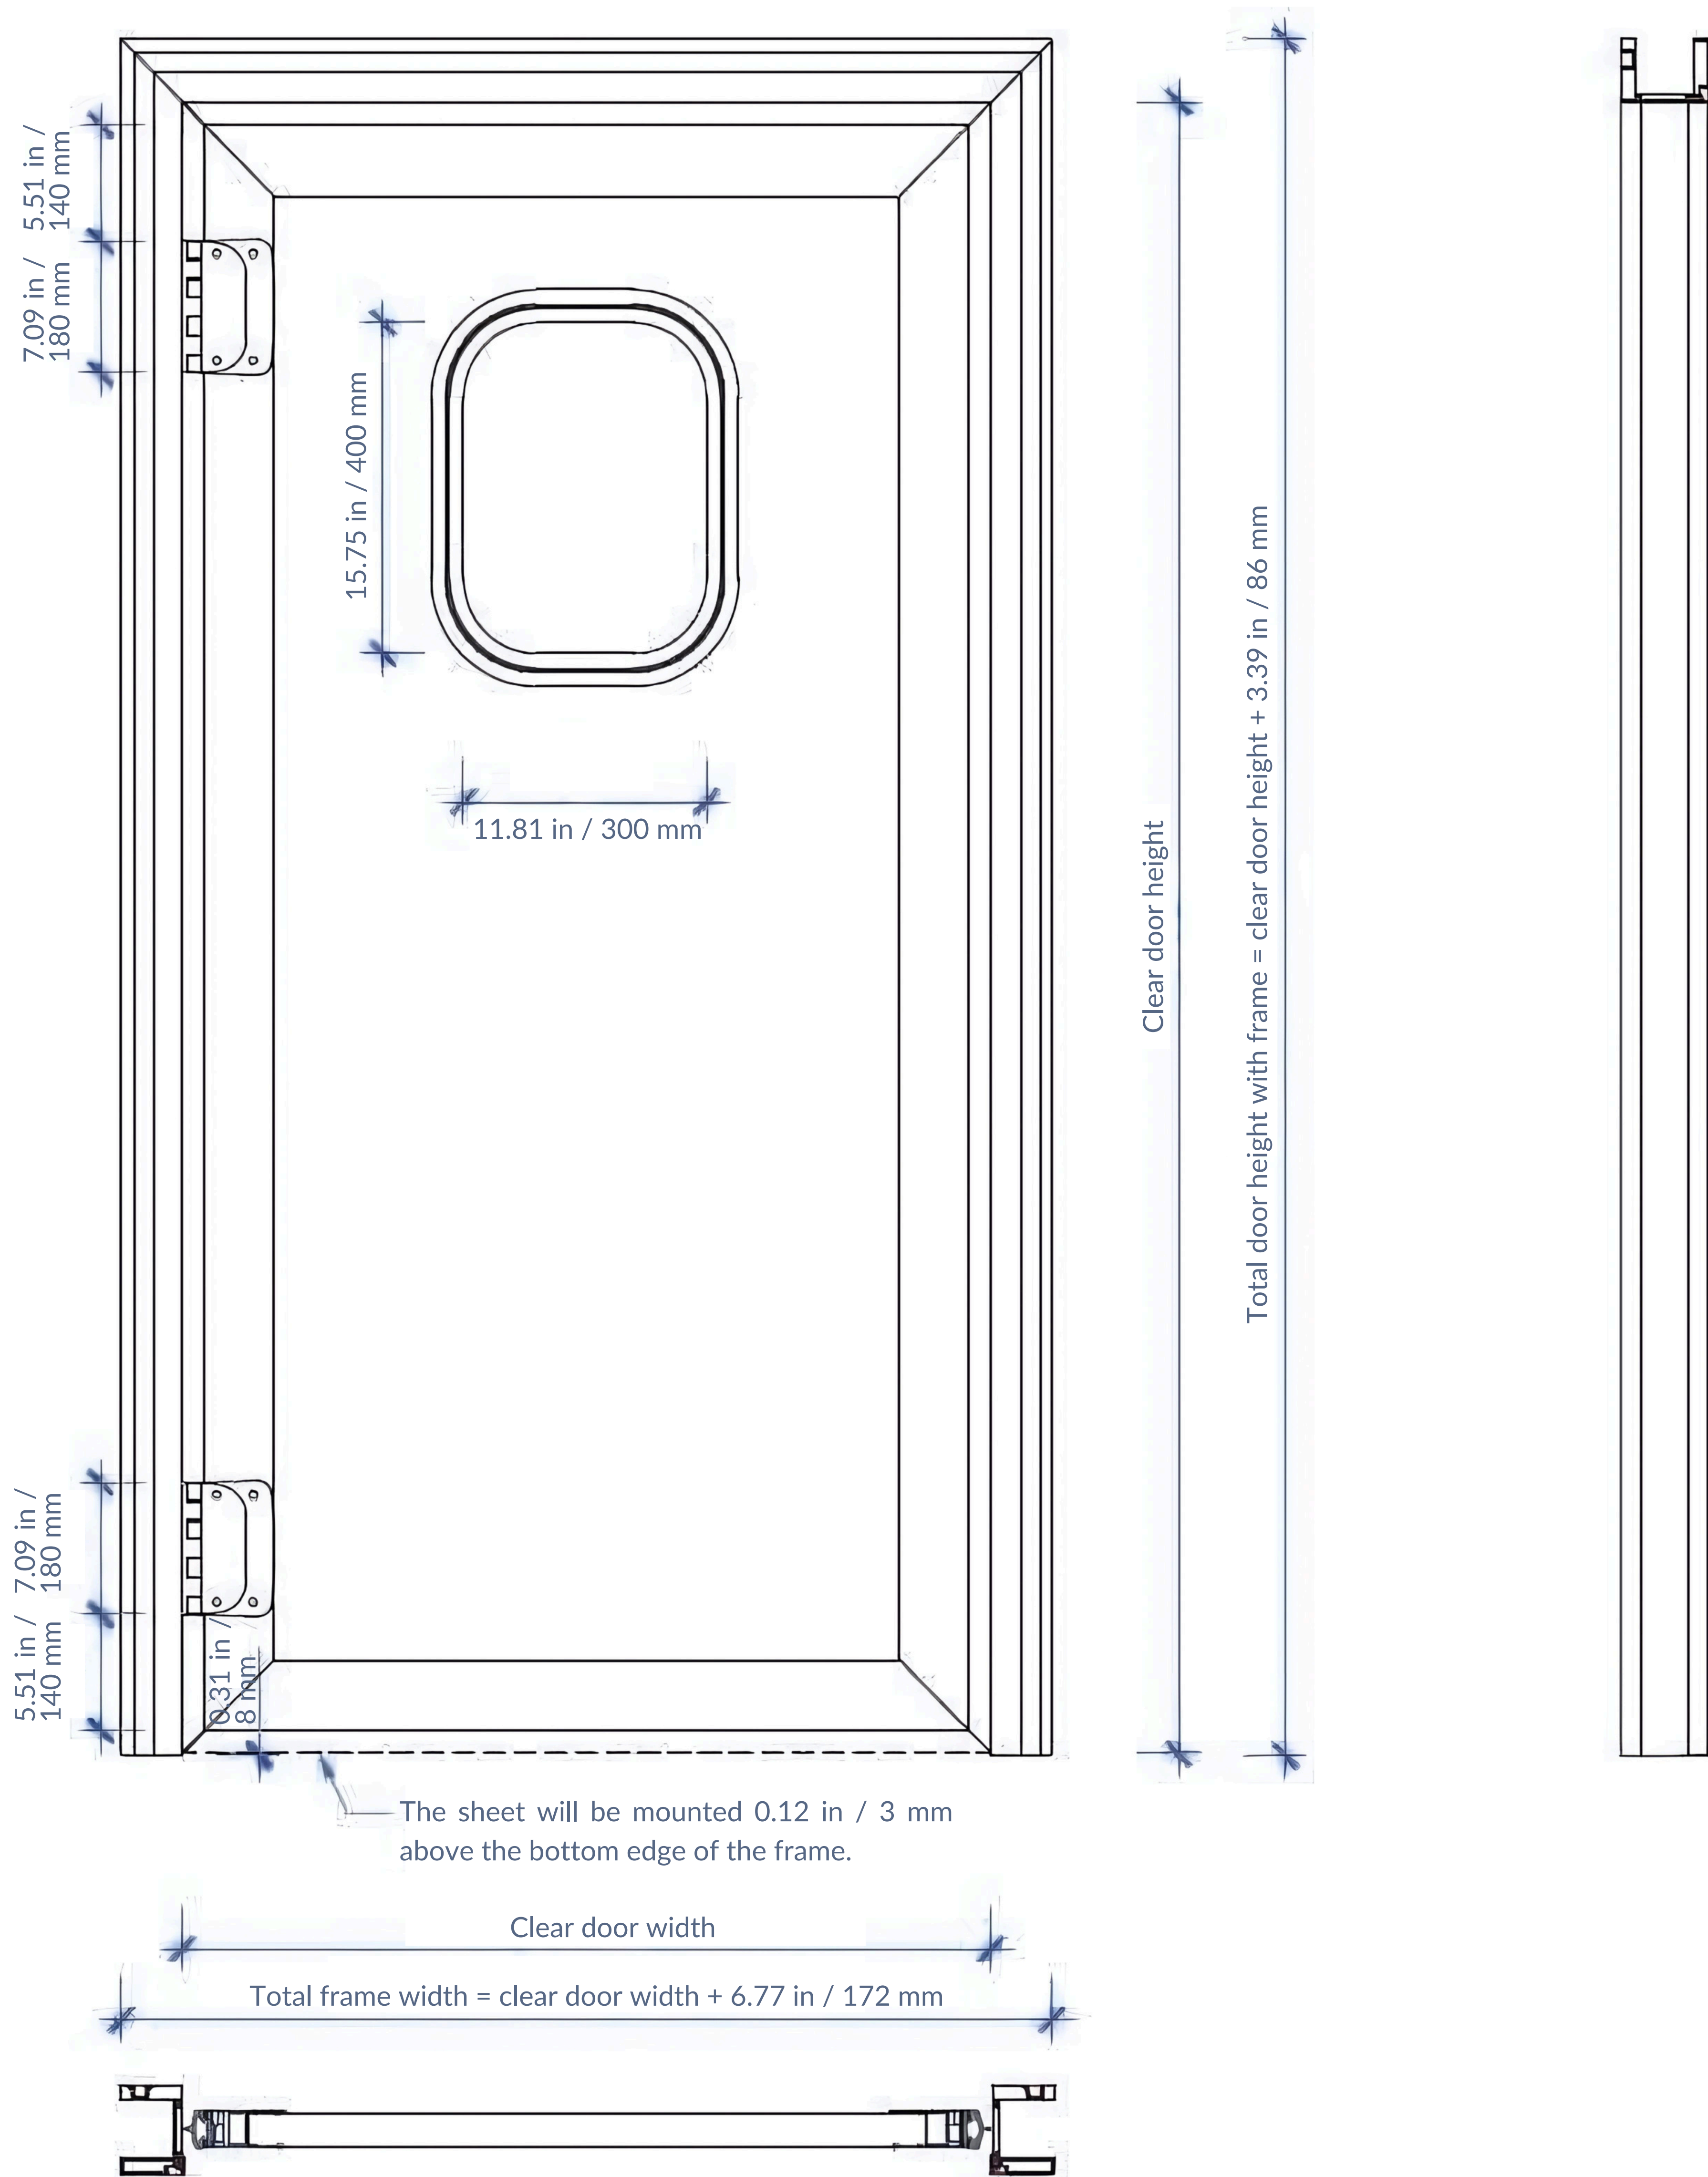

Basic dimensions for mounting

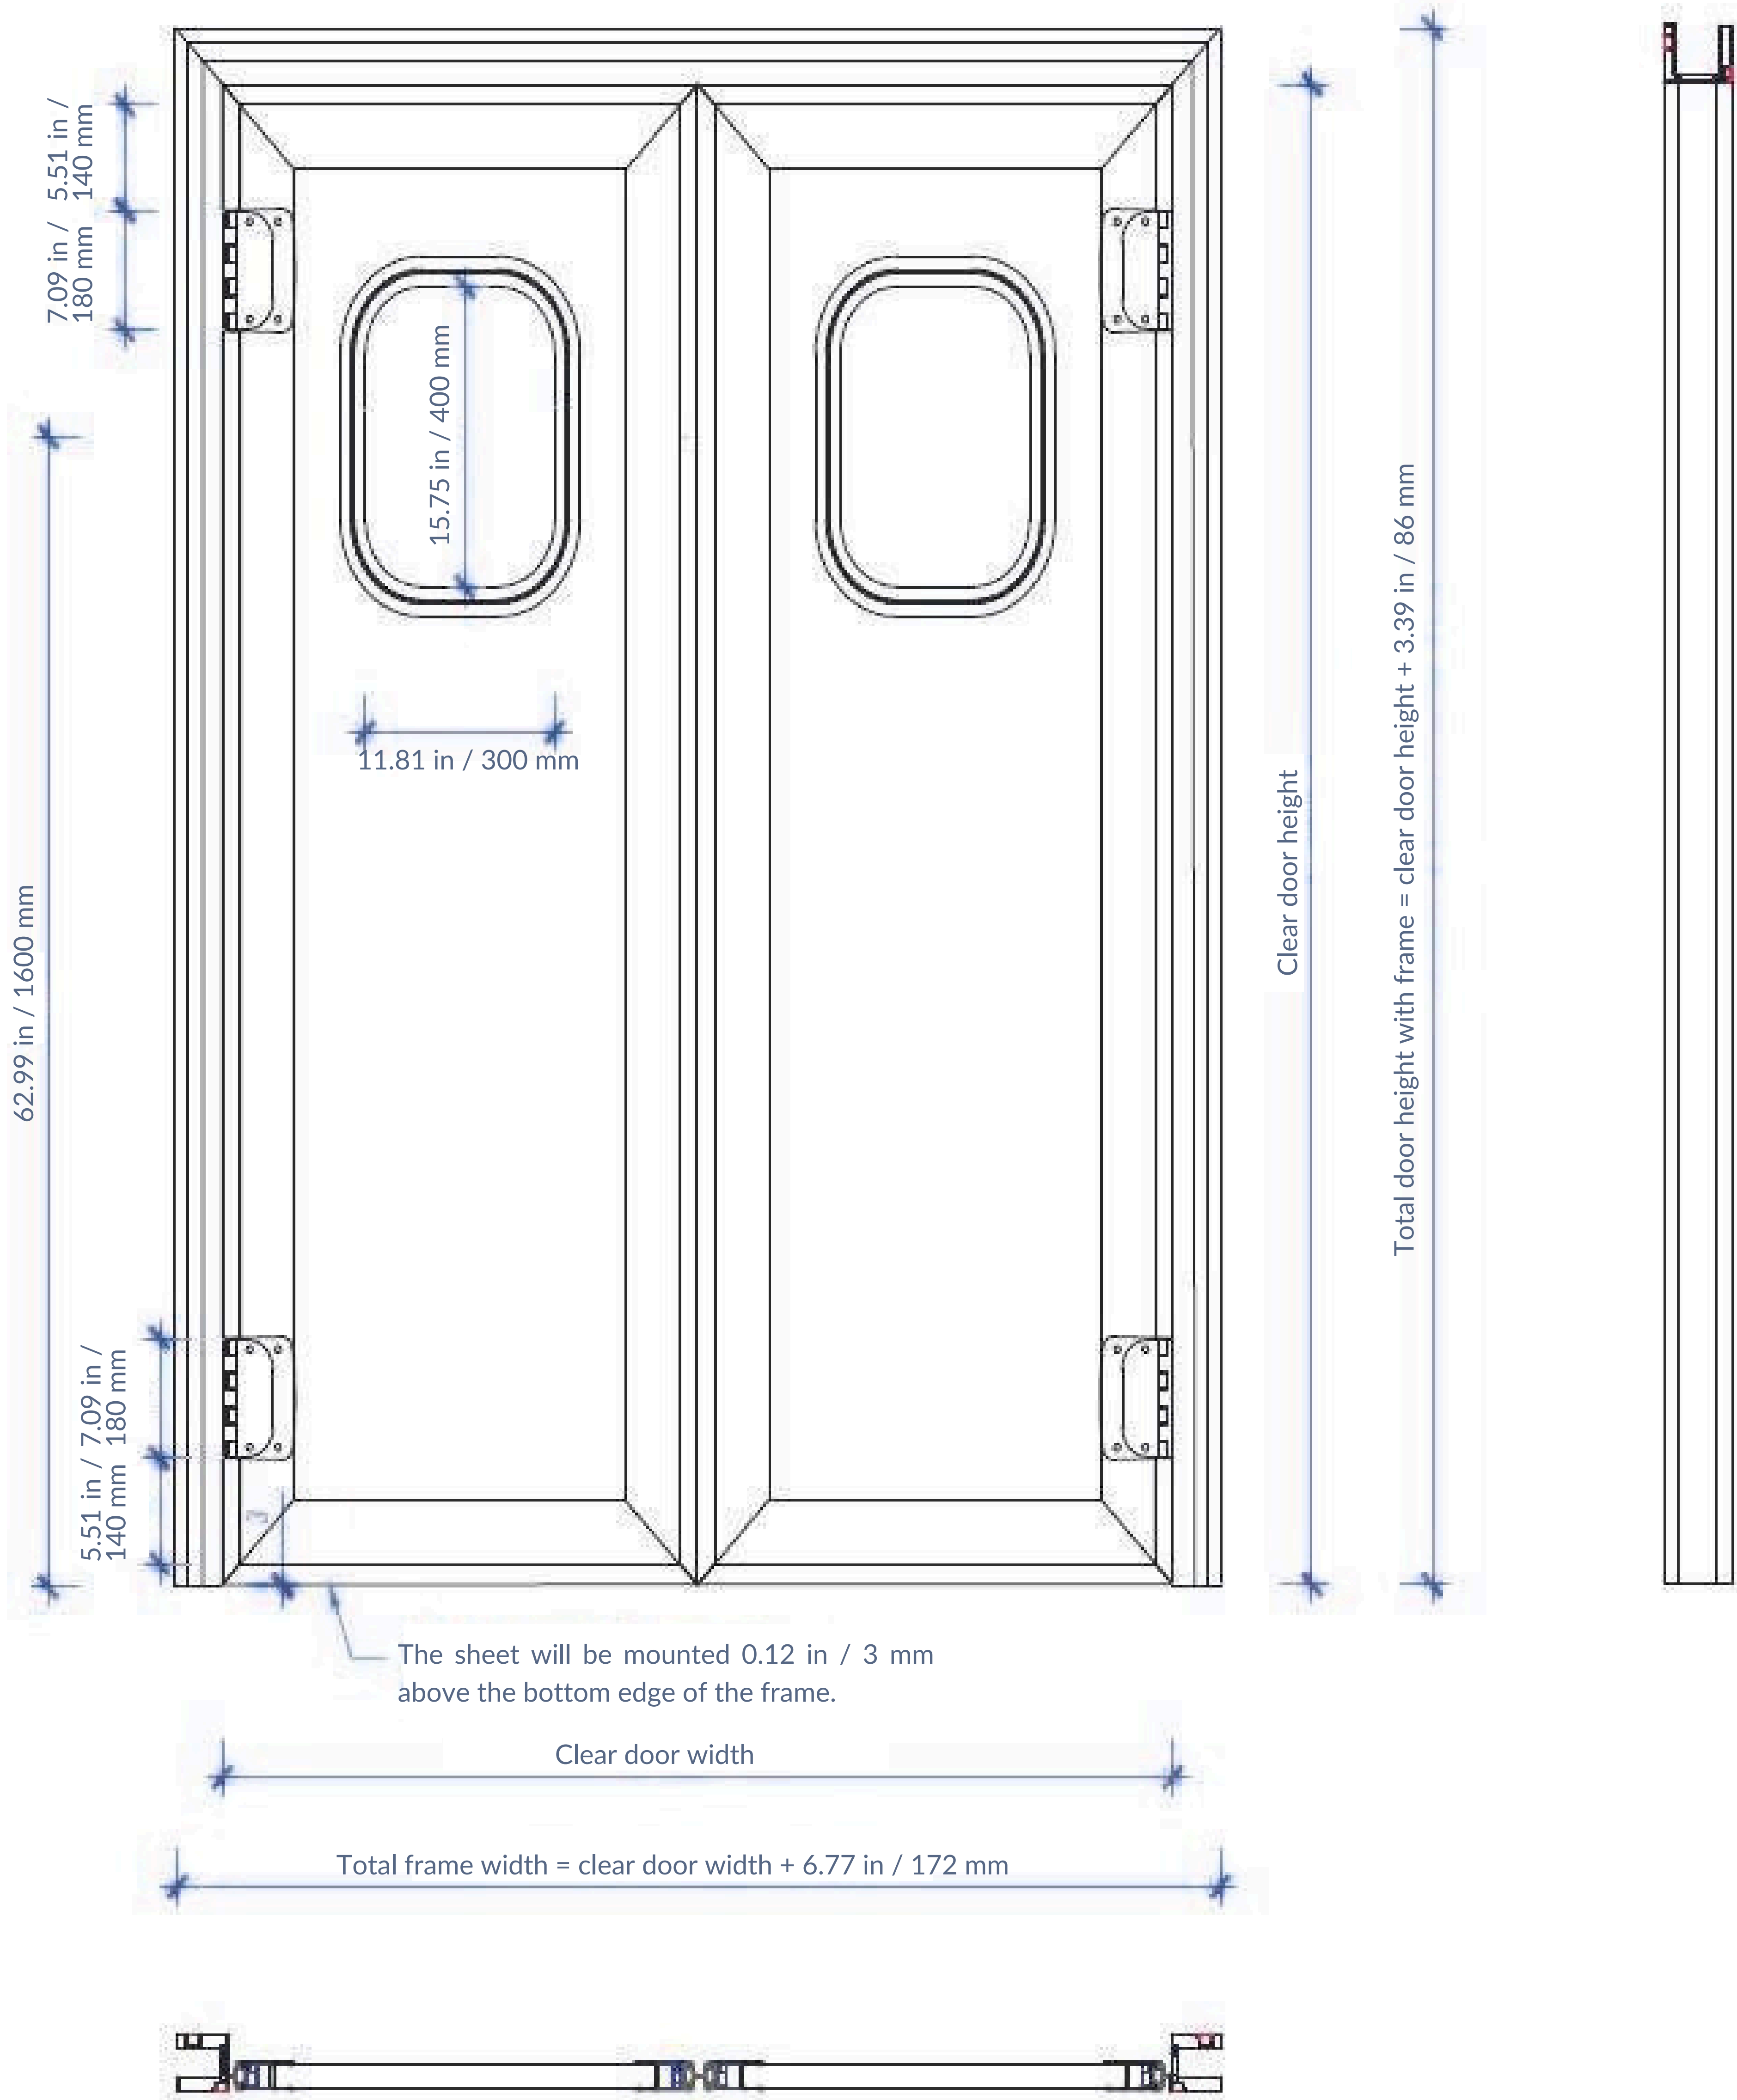

2-leaves swing refrigerator door



MIKE'S PANELS

COLD ROOM PANELS AND DOORS

+1 786-314-2942
info@mikespanelscorp.com
mikespanelscorp.com

16275 SW 208th Terrace, Miami, FL 33187, United States