



MIKE'S PANELS
COLD ROOM PANELS AND DOORS

Rapid Doors

- Finishes
- High energy efficiency
- Minimal maintenance
- Sturdiness

Fast Doors

Fast Doors are the ideal solution for all the requirements of intensive use and isolation of spaces with different environments and characteristics. Robust, practical and ideal for small, medium and large spaces, thus separating the most diverse types of environments.


Supermarkets, hypermarkets, warehouses, loading and unloading docks, platforms, laboratories and pavilions, are spaces where isolation is essential and all of them find in this product, the most flexible, viable and robust response.



Frame and drum cover in white lacquered aluminum



Sensor opening without the need to touch a button



Easy to assemble and maintain

Description

- **High-speed roll-up doors** can be manufactured with a maximum width of 177.17 in / 4500 mm and a maximum height of 177.17 in / 4500 mm. The doors have an attractive design and are made of a lacquered aluminum structure.
- **PVC canvas thickness:** it has a grammage of 28.04 oz/yd² / 950 g/m² and a thickness of 0.03 in / 0.8 mm
- **Insulation:** We offer two types of high-speed doors. Some for positive temperatures and others for negative temperatures of up to -7.6°F / -22°C.

Our doors stand out for:


- Finishes
- Easy Assembly and Maintain
- Different options, according to client

Fast Doors

Max. size	14.76' x 14.76'
Min. size	3.28' x 6.56'
Power supply	230 V
Electric current	2A
Gearmotor	Sommer
R.p.m	140 rpm
Phases	3-230/400 V
Power	0.55 Kw
Engine Protection Degree	IP54
Opening speed	2.62 ft/s to 3.94 ft/s
Operating temperature	-7.6°F a 140°F
Daily maneuvers	+ - 1000
Automatic closing	0 s to 999 s
Accesory feeding	12 Vac
Type of traction	Direct
Canvas material	P.V.C
Canvas weight	3.12 oz/ft ²
Thickness of the canvas	0.0315 in
Transparent material	P.V.C Mica
Thickness of transparent section	0.0866 in
Frequency	50/60 Hz
Machine base	Aluminum
Machine cover	Aluminum
Vertical guides	Aluminum
Safety bar	Curtain of light

OPTIONS

- SELF-REPAIRING
- REINFORCED INTERIOR
- REINFORCED EXTERIOR
- STACKABLE

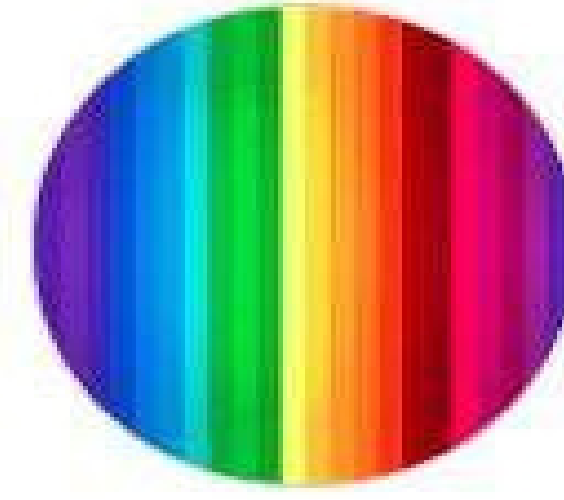

DIFFERENT COLORS IN OPTION

DOOR DETAILS



Opening sensor. No need to touch a button



Gearmotor





MIKE'S PANELS

COLD ROOM PANELS AND DOORS

+1 786-314-2942

info@mikespanelscorp.com

mikespanelscorp.com

16275 SW 208th Terrace, Miami, FL 33187, United States