



- Value for money
- Easy installation




# Service door

Superior quality service door for intensive use, injected panel, framed with anodized aluminum profile. Robust, durable and with an excellent aesthetic finish and sanitary suitability.

This model is manufactured as standard with a 0.02 in / 0.6 mm thick sheet lacquered in white. As an option, it can be manufactured with finishes in stainless steel, PVC, or other materials, with one or two sheets (depending on measurements). It is a high-performance door, designed to require minimal maintenance.



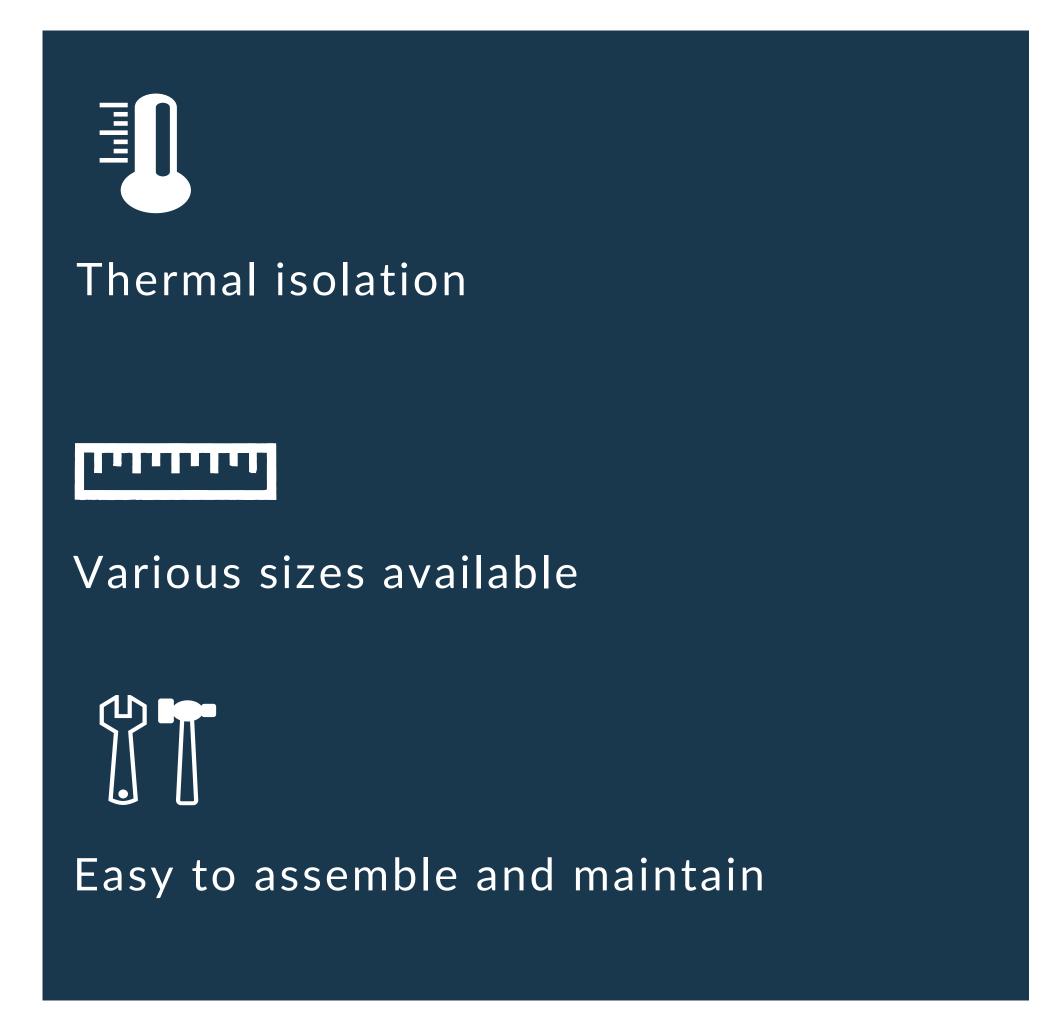

# Description

- The door includes a frame and counterframe in extruded aluminum with double thermal break. High resistance treatment fixed with hidden screws adaptable to different thicknesses.
- The use of high-quality materials and their design are designed so that the door has a minimum level of maintenance.
- The door leaf is made up of a refrigeration panel with polyisocyanurate (PIR)

#### Our doors stand out for:

- Quality of finishes
- Easy assembly and installation
- Adaptability to customer needs



#### Technical characteristics

## **PROFIL**

- White lacquered extruded aluminum frame and counter frame
- High corrosion resistance treatment
- Fixed with hidden screws and adaptable to different thicknesses

# **PROFIL**

- Anodized extruded aluminum (stainless)
- High corrosion resistance treatment

### **ISOLATION**

Rigid polyisocyanurate (PIR) foam

#### **THICKNESSES**

• 40 mm / 1.57 in

# LOCK BURLETTE

- Galvanized steel and white lacquered RAL 1006
- Sheet thickness 0.02 in / 0.6 mm
- Very flexible, double-celled and resistant to negative temperatures

# **OPENING**

- Single-action stainless steel hinges
- A2 stainless steel

# **SCREWS**

External and internal handle type stainless steel latch

# **OPTIONS**

- 1 or 2 sheets according to needs (maximum width 1 sheet 39.37 in / 1000 mm and 2 sheets 78.74 in / 2000 mm)
- Airplane wing type sheet protection in 0.20 in / 5 mm aluminum or 0.12 in / 3 mm stainless steel
- Methacrylate viewfinder in 0.24 in / 6 mm measures 11.81x15.75 in / 300x400 mm
- Anodized aluminum door closer

and their characteristics may vary

The accessories and hardware shown are for reference only



DS-1 PHOTOS









# MIKE'S PANELS COLD ROOM PANELS AND DOORS

+1 786-314-2942
info@mikespanelscorp.com
mikespanelscorp.com

16275 SW 208th Terrace, Miami, FL 33187, United States